


[February 2018 Lead2pass Free 400-351 Exam Questions Download 100% Pass 400-351 Exam 305q

Lead2pass Free Cisco 400-351 Braindumps VCE Updated: <https://www.lead2pass.com/400-351.html> QUESTION 11 While troubleshooting a failed central web authentication configuration on cisco WLC, you discover that the Cisco WLC policy manager state is showing RUN For new client and not CENTRAL_WEB_AUTH, what is most likely the issue.? A. The WLAN Layer 2 security should be sent to WPA+WPA2B. The WLAN NAC state should be set to RADIUS NACC. The web login page under the cisco WLC security should be set to external (redirect to external server)D. The WLAN layer 3 security should be set to web page policy with condition web redirect.

Answer: B QUESTION 12 Two autonomous Aps are connected to a switch on the same VLAN both APS are configured with the same SSID and WPA2-PSK. After making configuration changes to one of the APs .spanning tree disabled one of the switch ports into which AP was plugged? Which two options describe possible reasons that spanning tree disabled a port? (choose Two) A. One of the Aps was configured as a universal workgroup bridge.B. It is not possible for spanning tree to disable a port. The bridging loop must have been coincidentalC. Spanning tree was disabled on both ApsD. PortFast was enabled on all portsE. One of the APs was configured as a standard workgroup bridge. Answer: AE

QUESTION 13 During the Cisco 5760 WLC high availability active and standby process (elected or re-elected), which factor can determine which Cisco 5760 WLC become active? A. The cisco 5760 WLC the highest stack member priority valueB. the cisco 5760 WLC the highest IP addressC. the cisco 5760 WLC the lowest stack member priority value.D. the cisco 5760 WLC the highest Mac address Answer: A QUESTION 14 Refer to the exhibit your colleague a junior network engineer is struggling to enable DHCP option 82 in the layer 3 switch which is in the DMZ for a mobile client under a guest anchor Cisco wireless LAN controller deployment . What is your answer?

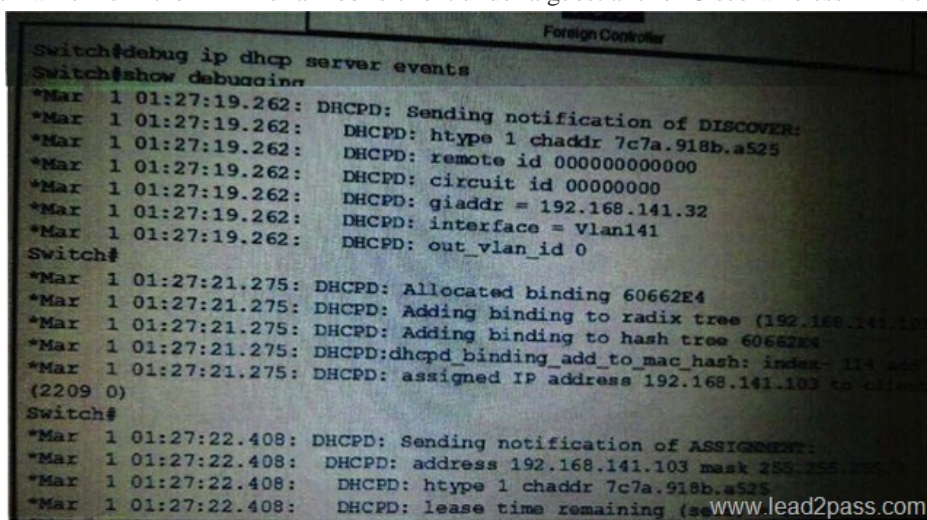

```
Switch#debug ip dhcp server events
Switch#show debugging
*Mar 1 01:27:19.262: DHCPD: Sending notification of DISCOVER:
*Mar 1 01:27:19.262: DHCPD: htype 1 chaddr 7c7a.918b.a525
*Mar 1 01:27:19.262: DHCPD: remote id 000000000000
*Mar 1 01:27:19.262: DHCPD: circuit id 00000000
*Mar 1 01:27:19.262: DHCPD: giaddr = 192.168.141.32
*Mar 1 01:27:19.262: DHCPD: interface = Vlan141
*Mar 1 01:27:19.262: DHCPD: out_vlan_id 0
Switch#
*Mar 1 01:27:21.275: DHCPD: Allocated binding 60662E4
*Mar 1 01:27:21.275: DHCPD: Adding binding to radix tree (192.168.141.103)
*Mar 1 01:27:21.275: DHCPD: Adding binding to hash tree 60662E4
*Mar 1 01:27:21.275: DHCPD:dhcpd_binding_add_to_mac_hash: index= 114
*Mar 1 01:27:21.275: DHCPD: assigned IP address 192.168.141.103 to client
(2209 0)
Switch#
*Mar 1 01:27:22.408: DHCPD: Sending notification of ASSIGNMENT:
*Mar 1 01:27:22.408: DHCPD: address 192.168.141.103 mask 255.255.255.0
*Mar 1 01:27:22.408: DHCPD: htype 1 chaddr 7c7a.918b.a525
*Mar 1 01:27:22.408: DHCPD: lease time remaining (see www.lead2pass.com
```

A. DHCP proxy must be enabled for DHCP option 82 to operate correctly. All Cisco WLCsthat will be in the setup must have the same DHCP proxy setting.B. DHCP option 82 must be enabled on the dynamic interface with which theWLANis associatedC. DHCP option 82 is not supported when it is used with auto-anchor mobilityD. The mobility tunnel datapath control path or both between the anchor cisco WLC and foreign WLC are down. Answer: C QUESTION 15RX-SOP is configured for SGHz radio with value set as "High Threshold". Which two clients will associate to the AP? (Choose Two) A. client with RSSI-75 dBmB. client with RSSI-79d8mC. client with RSSI-77dBmD. client with RSSI-73dBm Answer: AD QUESTION 16Which MSS value is appropriate on a Cisco 5508 WLC in an IPV6-only environment? A. 1236B. 2131C. 1285D. 1331 Answer: D QUESTION 17Refer to the exhibit .according to the debugs and loin the Cisco WLC and Cisco LAP which WLC discovery Algorithm is used by the LAP to join the Cisco WLC?

```
Jan 15 18:13:26.655: %SDCP-6-ADDRESS_ASSIGN: Line protocol on Interface Dot11Radio0/0/0
192.168.139.103, mask 255.255.255.0, hostname AP6c20.56a8.32a0
Jan 15 18:13:30.515: APWVC: Succeeded to activate all the STPL protocols
Jan 15 18:13:30.515: APWVC: Registering with CPT
Jan 15 18:13:30.515: APWVC: CPT registration of delete callback succeeded
Jan 15 18:13:30.515: Pool-Attach: paka 10174 radiol1566
Default route without gateway, if not a point-to-point interface, may impact performance
Jan 15 18:13:37.371: AP Image integrity check PASSED
Jan 15 18:13:37.375: %VMAP-3-CLIENTERRLOG: Config load from flash failed.
cfg
Jan 15 18:13:37.443: validate sha2 block: no SHA2 block present on this AP
Jan 15 18:13:37.463: %LINK-5-CHANGED: Interface Dot11Radio0, changed state to up
Jan 15 18:13:37.463: %LINK-5-CHANGED: Interface Dot11Radio1, changed state to up
Error opening flash/capwap-saved-config (no such file or directory)
Jan 15 18:13:47.467: %SYS-6-LOGGINGHOST_STARTSTOP: Logging to host 255.255.255.255
S14 CLI Request Triggered
Translating "CISCO-CAPWAP-CONTROLLER.cisco.com"...domain server (192.168.139.103)
Jan 15 18:13:57.431: %CDP_PD-4-POWER_OK: Full power - NEGOTIATED (dlsw power)
Jan 15 18:13:58.487: %CAPWAP-8-DHCP_OPTION_43: Controller address 192.168.139.103
through DHCP
Jan 15 18:13:58.535: %LINK-6-UPDOWN: Interface Dot11Radio0, changed state to up
Jan 15 18:13:58.535: %LINK-6-UPDOWN: Line protocol on Interface Dot11Radio0, changed
state to up
Jan 15 18:13:58.535: %LINK-6-UPDOWN: Interface Dot11Radio1, changed state to up
Jan 15 18:13:58.535: %LINK-6-UPDOWN: Line protocol on Interface Dot11Radio1, changed
state to up
Jan 15 18:13:58.535: %LINK-6-UPDOWN: Line protocol on Interface Dot11Radio0, changed
state to up
Jan 15 18:13:58.535: %LINK-6-UPDOWN: Line protocol on Interface Dot11Radio1, changed
state to up
Jan 15 18:13:58.535: %LINK-6-UPDOWN: Line protocol on Interface Dot11Radio0, changed
state to up
Jan 15 18:13:58.535: %LINK-6-UPDOWN: Line protocol on Interface Dot11Radio1, changed
state to up
MAC debugging ..... disabled
Debug Flags Enabled:
capwap packet enabled
capwap events enabled
capwap state enabled
Debug packet enabled.
*spanApTask2: Apr 10 21:34:37.440: <<<< Start of CAPWAP Packet >>>>
*spanApTask2: Apr 10 21:34:37.440: CAPWAP Control msg Recd from 192.168.139.103, port 2537
*spanApTask2: Apr 10 21:34:37.440:      Src: 192.168.139.103, Radio ID: 0, WRED: 1
*spanApTask2: Apr 10 21:34:37.440:      Msg Type: CAPWAP_DISCOVERY_REQUEST
*spanApTask2: Apr 10 21:34:37.440:      Msg Length: 165
*spanApTask2: Apr 10 21:34:37.440:      Msg SeqNum: 1
*spanApTask2: Apr 10 21:34:37.440:      Type: CAPWAP_MESSAGE_DISCOVERY_TYPE, Length 1
*spanApTask2: Apr 10 21:34:37.440:      Discovery Type: CAPWAP_DISCOVERY_TYPE_UNKNOWN
*spanApTask2: Apr 10 21:34:37.440:      Type: CAPWAP_MESSAGE_WTP_BOARD_DATA, Length 62
*spanApTask2: Apr 10 21:34:37.440:      Vendor Identifier: USG409500
*spanApTask2: Apr 10 21:34:37.440:      WTP_SERIAL_NUMBER: AIR-CAP3602I-M-K9
*spanApTask2: Apr 10 21:34:37.440:      Type: CAPWAP_MESSAGE_WTP_DESCRIPTOR, Length 40
*spanApTask2: Apr 10 21:34:37.440:      Maximum Radius Supported: 2
*spanApTask2: Apr 10 21:34:37.440:      Type: CAPWAP_MESSAGE_WTP_FRAME_TUNNEL, Length 1
*spanApTask2: Apr 10 21:34:37.440:      WTP Frame Tunnel Mode:
*spanApTask2: Apr 10 21:34:37.440:      NATIVE_FRAME_TUNNEL_MODE
*spanApTask2: Apr 10 21:34:37.440:      Type: CAPWAP_MESSAGE_WTP_MAC_TYPE, Length 1
*spanApTask2: Apr 10 21:34:37.440:      WTP Mac Type:
www.lead2pass.com
```

A. DHCP server LAP sends a layer 3 CAPWAP discover request to the Cisco WLC that is listed in the DHCP option 43. B. configured LAP sends a unicast layer 3 CAPWAP discover request to the Cisco WLC IP address that the LAP has in its NVRAM. Broadcast lap broadcasts a layer 3 CAPWAP discover message on the local ip subnet. D. DNS lap resolve the DNS Name CISCO-CAPWAP-CONTROLLER cisco to the Cisco WLC ip address then it sends a unicast layer 3 CAPWAP discovery request to the Cisco WLC. Answer: A QUESTION 18 Which port does cisco JSE use by default to send RADIUS CoA messages to the Cisco WLC? A. UDP 3799B. UDP 1813C. UDP 1700D. TCP 1812 Answer: C **400-351 dumps full version (PDF&VCE):** <https://www.lead2pass.com/400-351.html> Large amount of free **400-351** exam questions on Google Drive: <https://drive.google.com/open?id=0B3Syig5i8gpDY0FaMFVrWHdXWEk>